

PEGGED SKIRT WITH PLEATS

Design Analysis

The side seams are tapered to create a basic peg skirt. Pleats along the waistline radiate toward side seam. The stylized waistband points at center front. The basic back skirt is tapered with a slit at back seam.



Pattern Plot and Manipulation

Figure 1

- Trace front skirt.
- Draw a line from 1 inch below center front to dart leg at waist.
- Mark 1 inch in at side hem and draw line to hip for pegged effect.
- Draw slash lines for pleats as shown.
- Cut pattern from paper. Trim broken line areas. Save wedge for waistband.

Figure 2

- Cut slash lines from waist to, not through, side seam and hem.
- Close waist darts (broken line).
- Spread each section 2 inches or more. Secure.
- Trace around pattern, marking pleat opening.

Skirt Pleats

- Fold the paper between openings (pleats).
- With tracing wheel, cross over folded pleats at waistline. Open pattern and pencil in perforated marks at waist.
- Notch for pleats.
- Trace back, taper side seam, and notch for slit (example: 7 inches up from hem; not illustrated).

Figure 3 Belt Construction

- Trace basic belt on fold of paper. (See page 237 for belt development, if needed.)
- Place wedge section to bottom of belt at center front and trace.
- Draw grainline and complete pattern for test fit.

Figure 3




Figure 1



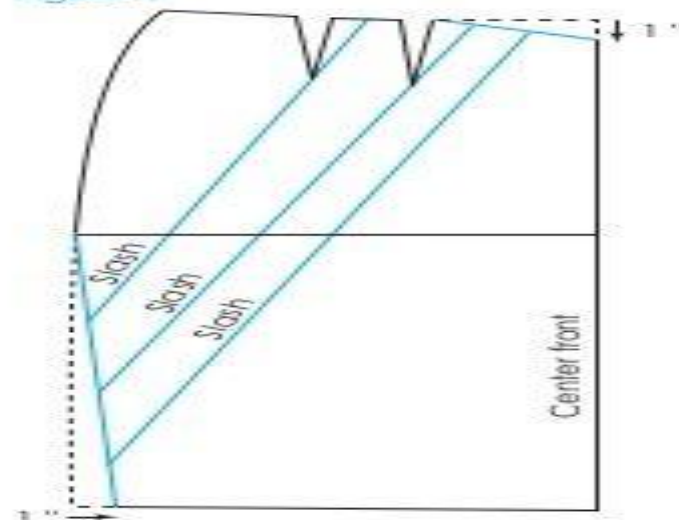


Figure 2



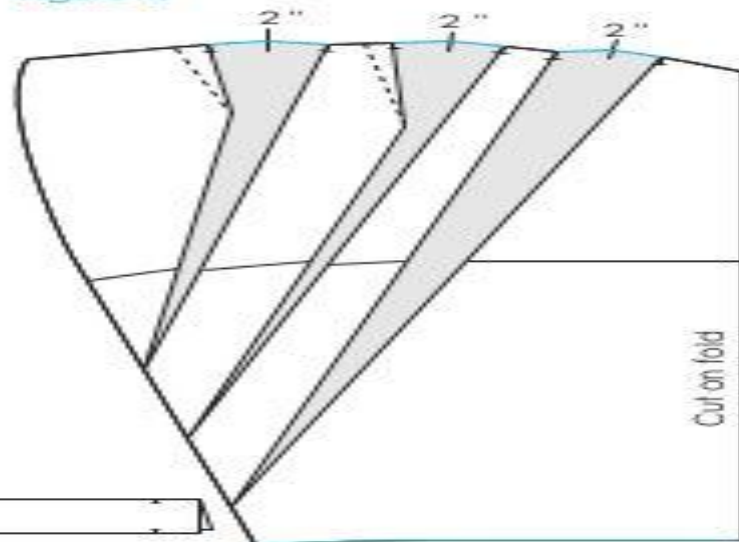

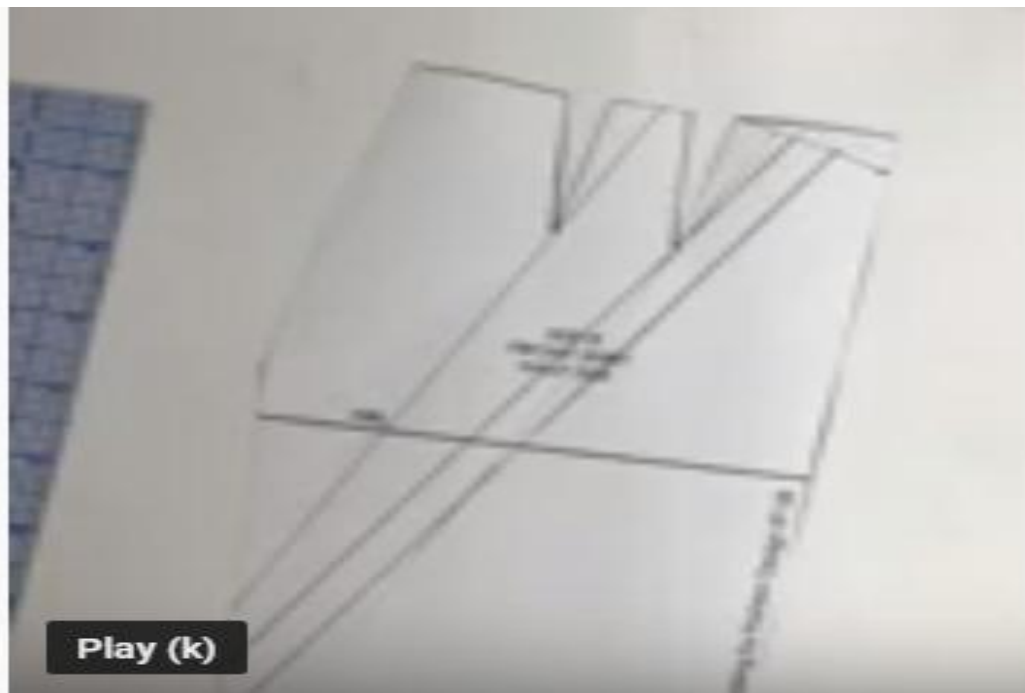


Play (k)

Pattern Plot and Manipulation

Figure 1

- Trace from last.
- Draw a line 1 inch below center front to back leg at waist.
- Mark 1 inch on all side lines and draw line to top for puffed effect.
- Draw slash lines for pleats as shown.
- Cut pattern from paper. This includes the area, save wedge for waistband.



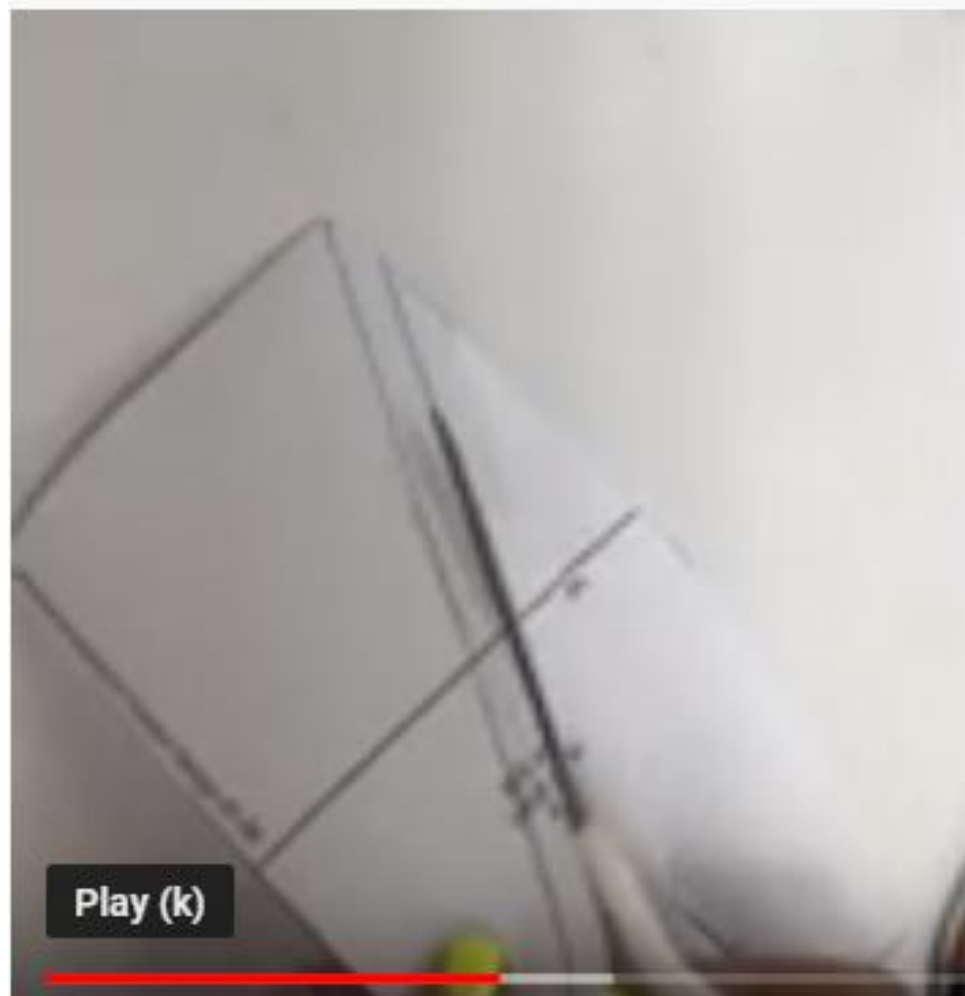

Play (k)

Figure 2

- Cut dash lines from waist to, not through, side seam and hem.
- Close waist darts (broken line).
- Spread each section 2 inches or more, from.
- Trace around pattern, marking pleat opening.

